

AC SOLENOID & SOLENOID BRAKES



BCH
ELECTRIC
LIMITED



BCH

Solenoid Brakes

BCH AC Solenoid operated brakes type 'S' are designed for long life, easy installation and minimum maintenance. They are electrically released and spring applied providing 'Fail-safe' operation. The retarding torque developed is directly proportional to the spring pressure.

The brake wheel is of relatively large size in relation to the torque developed by the brake. This permits use of a large brake shoe lining and lower shoe pressure. Low shoe pressure, equally distributed over a large lining area, results in even wear of the friction surfaces and even braking torque. The over-size wheel type construction also permits use of a smaller operating solenoid that requires less current for a given torque rating.

Low shoe pressure reduces the stress on all pins and pivot points to extend mechanical life and reduce maintenance costs. There is no unbalance of forces to cause side thrust during braking, because shoe type brake does not depend upon a wrapping action of the lining around the wheel.

Applications

Typical applications include conveyors, hoisting, equipment, machine tools, printing presses, small cranes, over head doors, vacuum moulding machines etc.

Constructional features

Special constructional features such as those listed below account for exceptionally long mechanical life of the brakes.

- (i) Neoprene shock absorber—prevents link pin breakage and increases the life of the solenoid.
- (ii) Hardened steel lever and spring gland—the hardened steel construction of the lever and spring gland reduces wear at the pins and all other points of contact.
- (iii) Cast iron wheel—The physical properties of the iron minimise the tendency of the wheel to deposit metal particles in the lining which could result in serious scoring of the wheel.
- (iv) Spring pins—The tight gripping spring pins insure against the loss of pins due to shock.
- (v) Inexpensive lining replacement—Linings attached to shoes by removable flat head groove-pins.
- (vi) Fewer joints—The shoe is actually a part of the shoe lever and not separate from it. This makes for fewer mechanical joints and keeps wear points at a minimum.
- (vii) Solenoid—The solenoid coil can be removed without disturbing the brake adjustment. Solenoid loading is designed to reduce wear.

Adjustments

Adjustments for torque and lining wear are conveniently and quickly made. Braking torque and lining wear adjustments are made at the top of the brake. A set screw and locking nut located on the top of the solenoid frame provide adjustment for equalising clearance between the brake shoes to prevent dragging when the brake is released.

Coil duty classification

Shunt brake coils are rated either for intermittent (1 hour) duty, or continuous duty. Intermittent duty indicates that the coil can be placed across the line for one hour without excessive heating. This is equivalent to 1/2 time duty or one minute on and one minute off. Coils rated for continuous duty can be connected across the line continuously without exceeding temperature limits.

The class of insulation of coils is class F.

Mounting

Type'S' brakes are designed and recommended for use and mounting only in the floor position. Side or vertical mountings are not recommended because the solenoid loading is altered resulting in accelerated and premature coil failure.

Brake selection

The method most generally used to determine the required braking torque is to calculate the full load motor torque by means of the following formula :

$$T = \frac{9552 \times kW}{n}$$

T = Full load motor torque in Newton Metre (Nm)
kW = Motor out put in kilowatts
n = Rated speed of the motor shaft on which brake wheel is mounted in revolution per minute (r.p.m.)

The torque rating of brake selected should be at least equal to the full load motor torque for the duty considered.

In some applications where the brake must stop or hold abnormal loads on the driving equipment, the braking torque must be determined using the extreme operating conditions. In these cases, the braking torque is determined by calculating the maximum load and



BCH

translating it into torque at the shaft on which the brake is mounted.

Because of the large lining area, the capacity of Type 'S' brakes is generally considered ample for average application. However when brakes are to be used for frequent stopping or for stopping heavy inertial loads requiring long periods of deceleration.

Complete details, including Wk^2 , speed of load referred to brake shaft and frequency of stops should be referred to the factory for analysis.

Brake selection chart

Brake Type	Wheel dia mm approx.*	Max. torque N.m	Moment of Inertia Wk^2 (kgm ²)	Coil duty
S-42	100	13.6	0.004	Continuous
S-51	140	34.0	0.018	Continuous
S-52	140	48.0	0.018	Intermittent
S-71	180	68.0	0.066	Continuous
S-72	180	102.0	0.066	Intermittent
S-2501	250	147.0		Continuous

- *(i) Approximate value of wheel diameter has been specified in view of rounding off the values as basically the wheel diameter is in inches. For exact dimensions, please refer to the dimensional drawing of the wheel.
- (ii) Wheel is supplied as an accessory to the brake.
- (iii) Wheels will be supplied having straight pilot bore of minimum size to be machined further upto maximum bore range by the customer.

Coil data

Class of insulation : Class F

Duty : Continuous or Intermittent

Brake Type	Coil Colour	Inrush Volt Amp	Inrush Watts	Sealed Volt Amp	Sealed MaxWatts
S-42	Red	465	310	90	20
S-51	Dark brown	2200	1300	250	70
S-52	Black	2350	1300	290	100
S-71	Dark brown	2200	1300	250	70
S-72	Black	2350	1300	290	100
S-2501	Dark brown	2800	1600	350	150

Dimensions (mm)

Type	Brake Torque		Size Rating																
	A	N.m.	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	R	S
S-42	101.6	13.6	73.2	177.8	66.6	31.8	139.7	77.7	9.8	16.0	73.2	6.4	69.9	41.2	41.2	-	76.2	79.3	44.5
S51/S52	139.7	34.0/48.0	101.6	239.8	88.9	50.8	212.9	104.6	11.1	25.4	124.0	9.7	82.6	50.8	50.8	79.3	95.3	79.3	-
S71/S72	177.8	68.0/102.0	127.0	290.6	111.3	63.5	241.3	127.0	14.3	25.4	152.4	-	108.0	53.9	76.2	79.3	120.7	79.3	-
S2501	250	147	172	387	152.5	107	325.5	174.5	17	38.5	198	-	125	68.1	90	90	158	130	-

Catalogue code: Product code-Type-Coil voltage code

Brake : Product code : S

Type	42	-	Corresponding	Torque	13.6	Nm
Type	51	-	Corresponding	Torque	34	Nm
Type	52	-	Corresponding	Torque	48	Nm
Type	71	-	Corresponding	Torque	68	Nm
Type	72	-	Corresponding	Torque	102	Nm
Type	2501	-	Corresponding	Torque	147	Nm
Voltage code.	A	-	110V 50 Hz			
	B	-	220V			
	L	-	380V			
	M	-	415V			
	C	-	440V			

(Please write voltage/frequency in place of voltage code for non-standard voltage/frequency)

A solenoid brake with torque rating of 13.6 Nm operating at 380V 50 Hz will be termed as S42L.

Accessories

Wheel (Drum)

Wheel dia	Catalogue code
4" 100 mm	AC 50 D4
5.5" 140 mm	AC 50 D5
7" 180 mm	AC 50 D7
250 mm	AC 50 D25

Spares

Description	Catalogue code			
Brake type	S-42	S-51/S-52	S-71/S-72	S-2501
Brake lining	SP50L1	SP50L2	SP50L3	SP50L4
Brake coil* (Continuous duty)	SP50MC01*	SP50MC21*	SP50MC21*	SP50MC31*
Brake coil* (Intermittent duty)		SP50MC22*	SP50MC22*	
Brake Shoe Assembly with lining	SP50SA1	SP50SA2	SP50SA3	SP50SA4


* For brake coil, suffix coil voltage code from brake code column.

Weight (kgs)

Type	Brake only	Net brake with wheel	Net wheel only
S-42	5.6	7.2	1.6
S-51/S-52	11.7	15.1	3.4
S-71/S-72	15.3	23.9	8.6
S-2501	20.0	37.4	17.4



BCH

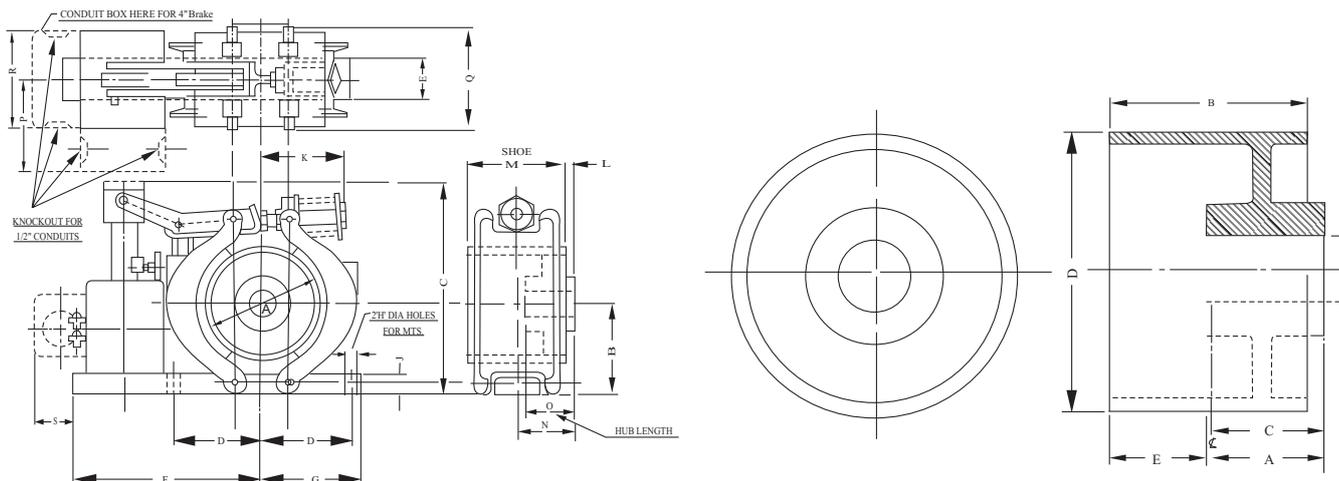

Drum Size approx	A	B	C	D		Bore		E
						Min	Max	
100	41	70	41	101.6	+0.00 -0.10	12.7	34.92	34.92
140	51	82	51	139.7	+0.00 -0.10	19.0	50.8	41.27
180	76	108	54	177.8	+0.00 -0.18	19.0	57.15	31.75
250	90.5	125	-	250	+0.00 -0.25	25.0	65	34.5

AC Solenoids

The remarkable efficiency of Bhartia Industries Limited's AC Solenoids (Pull Type) encourages application to a wide range of purposes requiring a definite pull motion under automatic or distant control in connection with electrically driven machinery.

Typical functions include the operation of electromechanical brakes and valves, various short-stroke motions on machine tools and many operations required in automatic machinery of all kinds.



Specifications

The solenoid consists of laminated frame and plunger with steel supporting frame. The epoxy moulded coil is held in place by means of flat steel springs to prevent transmission of shock to the coil. The plunger and frame are carefully machined to ensure quiet operations. Solenoids can be used for up to 600 operations per hour if the pull-in time is within specified limits. These solenoids are provided with fixing holes for floor mounting.

Electrical and mechanical ratings

Solenoid type Duty		Size B	Size D	Size E
		Continuous or intermittent	Continuous or intermittent	Continuous
Maximum stroke length (mm)		25	31.4	40.0
Pull at rated voltage (Gross)* kg		1.25	6.75	10.0
Pull at 85% of rated voltage (Gross)*	kg	0.9	4.5	7.0
Weight of plunger	kg	0.2	0.3	1.2
Operating time	m sec	70	70	70
Coil consumption (sealed)	VA	90	220	359.8
Coil consumption (in rush)	VA	465	1790	3693.5
Weight	kg	1.2	2.9	6.5

Standard coil voltage offered : 110, 220, 380, 415, 440V 50Hz




* When the solenoid is working against gravity, the weight of the plunger must be subtracted in order to ascertain the effective pull. When working with gravity, the weight of the plunger must be added.

Catalogue code - AC Solenoids




Product code	SL	SPSL
Solenoid size	B or D	E
	380V-L,415V-M	415-M

eg. SLBL represents Solenoid size B with 380V coil




Dimensions (mm)

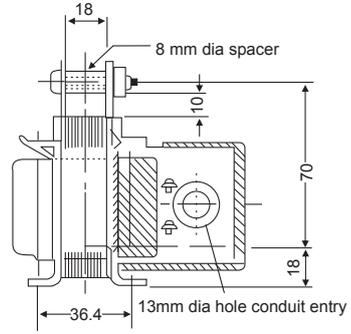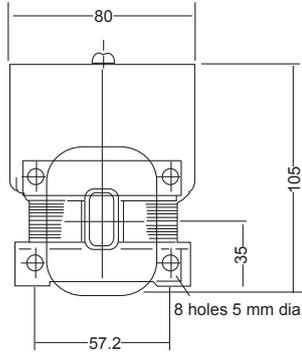

Solenoid Size B

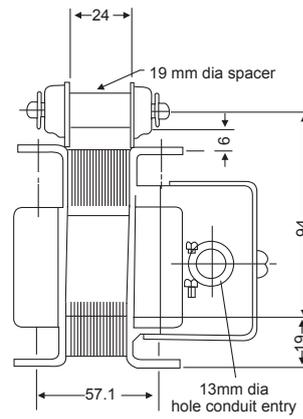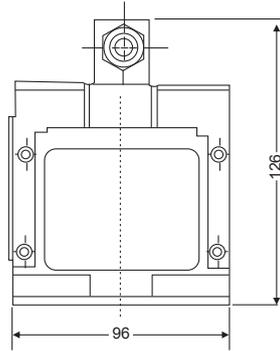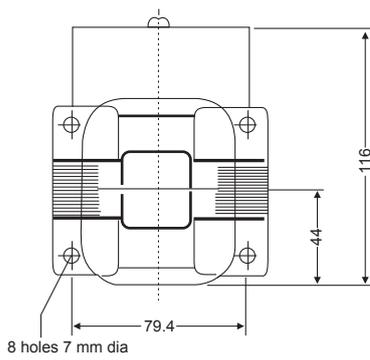

Solenoid Size D

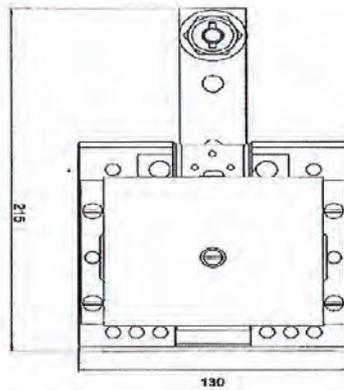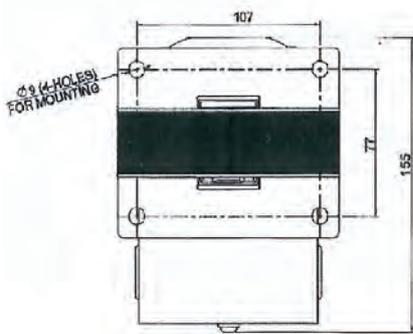

Solenoid Size E

- Power Control Products
- Starters & Submersible Pump Starters
- Industrial Enclosures
- Industrial Products
- Wires & Cables
- Motor Control Products
- Customised Solution
- Automation



BCH ELECTRIC LIMITED

Visit us at : www.bchindia.com

Corporate Office : 1105, New Delhi House, 27, Barakhamba Road, New Delhi-110 001 Tel. : 91-11-23316029/3610/6539/43673100 Fax : 91-11-23715247

CIN : U31103WB1965PLC026427, Customercare No. 1800-103-9262, E-mail : marketing@bchindia.com

Registered Office : Block 1E, 216, Acharya Jagadish Chandra Bose Road, Kolkata - 700 017

Works 1 : 20/4, Mathura Road, Faridabad-121 006 (Haryana) Tel. : 0129-4063000/4293000 Fax : 0129-2304016

Works 2 : 64-68, Sector-7, IIE, Pant Nagar, Rudrapur, Udham Singh Nagar - 263 153 (Uttarakhand) Tel. : 05944-250214/16 Fax : 05944-250215

Sales Offices :

Ahmedabad
103, Aaron,
Nr. SBI Laghuudyug branch,
Behind Sakar-1
Gandhigram Railway station,
Ellis bridge, Ahmedabad - 380006
Tel. : **079-26589719**
E-mail : ahmedabad@bchindia.com

Bangalore
2nd Floor, 130/5,
K.H. Road (Double road),
Bangalore - 560 027
Tel. : 080-22273478/41144878/
41144879
Fax : 080-22236759
E-mail : bangalore@bchindia.com

Bhubaneswar
Mallick Commercial
Complex Plot No.: A/69, unit - 3
Bhubaneswar - 751 001
Tel. : **0674-2380988**
E-mail : bhubaneswar@bchindia.com

Chandigarh (Panchkula)
Sco -129, IInd Floor,
Mdc, Sector-5 Panchkula,
Haryana-134 109
Tel. : **0172-5078957 / 5049905**
Fax : 0172-5049905
E-mail : chandigarh@bchindia.com

Chennai
Flat No. 3A, 3rd Floor,
Sree Apartments,
No.508, TTK Road,
Alwarpet, Chennai 600 018
Tel. : 044-24337046, 24337047
Fax : 044-24337047
E-mail : chennai@bchindia.com

Coimbatore
87, Dr. Nanjappa Road,
Coimbatore - 641 018
Tel. : 0422-2305311
Fax : 0422-2302599
E-mail : coimbatore@bchindia.com

Dehradun
8, Co-operative Industrial Estate,
Patel Nagar, Dehradun-248001
E-mail : dehradun@bchindia.com

Faridabad
20/4, Mathura Road,
Faridabad - 121 006 (Haryana)
Telfax : 0129-4293009
E-mail : faridabad@bchindia.com

Hyderabad
1-8-303/48/13/102, Arya One,
2nd Floor, P. G. Road,
Secunderabad - 500 003
Tel. : 040-66206263/27890306
Fax : 040-66207273
E-mail : hyderabad@bchindia.com

Indore
330-331, Indraprastha Tower,
3rd Floor, 6, M.G. Road,
Indore - 452 001
Tel. : **0731-2510011**
Fax : 0731-2510012
E-mail : indore@bchindia.com

Jaipur
25, Hathroi, Gopalbari,
Jaipur - 302 001
Tel. : **0141-2363521**
Fax : 0141-2363521
E-mail : jaipur@bchindia.com

Jamshedpur
3rd Floor, Aastha Trade Centre,
'C' Road, Bistupur,
Jamshedpur - 831 001
Tel. : **0657-2321097/2321481**
E-mail : jamshedpur@bchindia.com

Kolkata
Block 1E, 216,
Acharya Jagadish Chandra Bose Road,
Kolkata - 700 017
Tel. : **033-22871728**
E-mail : kolkata@bchindia.com

Lucknow
Madan Plaza, 3rd Floor,
14, Station Road,
Lucknow - 226 001
Tel. : **0522-4025597/4025997**
Fax : 0522-4025697
E-mail : lucknow@bchindia.com

Ludhiana
S.C.O.- 18, 2nd Floor,
Feroze Gandhi Market,
Ludhiana - 140 001
Tel. : **0161-5021807/5022808**
Fax : 0161-5021807
E-mail : ludhiana@bchindia.com

Mumbai
A-151, Mittal Tower,
Nanman Point,
Mumbai - 400 021
Tel. : **022-22822947/22850162**
Fax : 022-22822858
E-mail : mumbai@bchindia.com

Nagpur
Flat No. T/12, 3rd Floor
Baldeo Apartment,
Behind Railway Station, Bajeria
Nagpur (M.S.) - 440018
E-mail : nagpur@bchindia.com

New Delhi
801, Akash Deep Building,
26A, Barakhamba Road,
New Delhi - 110 001
Tel. : **011-23313878/66307065**
Fax : 011-23739230
E-mail : delhi@bchindia.com

Pune
8, Sarosh Bhavan,
16-B/1, Dr. Ambedkar Road,
Pune - 411 001
Tel. : **020-26052590**
Telefax : 020-26135224
E-mail : pune@bchindia.com

Raipur
2nd Floor, Building No. B-234,
Indira Gandhi Vyavasayik Parisar,
Pandri, Raipur - 492 004
Tel. : **0771-4020213**
Fax : 0771-2582680
E-mail : raipur@bchindia.com

Trichy
2B, Kannagi Street,
Ayyappa Nagar, K.K.Nagar
Trichy - 620 021, Tamilnadu
Tel. : **0431-4040497**
E-mail : trichy@bchindia.com

Vadodara
301, Third Floor, "Florence Classic",
10, Ashapuri Co-Op. Hsg. Soc. Ltd., Opp. VUDA Housing,
Near Cow Circle, Akota, Vadodara - 390 020
Tel. : **0265-2345068/2345069**
Telefax : 0265-2345068,
E-mail : vadodara@bchindia.com

Other Branch Locations

Bhubaneswar : bhubaneswar@bchindia.com, **Cochin :** cochin@bchindia.com, **Gurgaon :** gurgaon@bchindia.com, **Guwahati :** guwahati@bchindia.com, **Hospet :** hospet@bchindia.com,
Hubli : hubli@bchindia.com, **Madurai :** madurai@bchindia.com, **Vishakapatnam :** vizag@bchindia.com, **Surat :** surat@bchindia.com

Resident Engineer Locations

Baddi	Gurgaon	Madurai	Rajahmundry
Bardhaman	Haridwar	Muzaffarnagar	Salem
Bhilai	Hubli	Nagpur	Surat
Bhubaneswar	Hospet	Nashik	Udaipur
Cochin	Jodhpur	Patna	Vapi
Dehradun	Kakinada	Puducherry	Vishakhapatnam
Durgapur	Kota	Rajkot	Warangal

Since product improvement is a continuous process, the data furnished in this brochure may undergo revision without prior notice.